

Automatic and Improved Method for Diabetic Retinopathy Detection

^aKovoori Arinika, ^bSwetha

^aKovoori Arinika, M.Tech (ECE), Department of ECE, Aurora Scientific and Technological Research Academy, Hyderabad, 500005, India

^bS.Swetha, Associate Professor, Department of ECE, Aurora Scientific and Technological Research Academy, Hyderabad, 500005, India

Abstract

Diabetic Retinopathy (DR) is a complication of diabetes and a leading cause of vision loss. DR detection, poor quality retinal image makes more difficult the analysis for ophthalmologist. Automatic segmentation of blood vessels in retina is helpful for ophthalmologists to screen larger populations. This literature presents an automatic analysis to extract blood vessels with high accuracy. This algorithm comprised of Gabor filter with local entropy thresholding for vessels extraction under various normal or abnormal conditions. The frequency and orientation of Gabor filter a retuned to match that of a part of blood vessels to be enhanced in a green channel image. Extraction of blood vessels pixels are classified by local entropy thresholding technique in this method. The performance of the proposed algorithm is analysed by MATLAB software with DRIVE database.

KEYWORDS- Retinal image, Bloodvessels, Diabetic Retinopathy, Vessels extraction, Fundus images, Gaborfilter, Local entropy thresholding.

I. Introduction

Medical Image diagnostic processing has already become an important part of clinical routine. Blood vessels damaged from diabetic retinopathy can cause vision loss. Diabetic retinopathy is a leading cause of adult blindness, and screening can reduce the incidence. Retinal images are noise and low contrast poses significant Challenges to these segegmentation of blood vessels.

Many Segmentation algorithms have been presented to provide either automated or semi automated detection of Blood vessels. Automated diagnosis may also aid decision making for optometrists. The greatest emphasis in automated diagnosis has unsurprisingly been given to the detection of diabetic retinopathy. Computer based analysis for automated extraction of blood vessels in retinal images will help ophthalmologists screen larger populations for vessel abnormalities. A wide variety of approaches have been proposed for retina blood vessels segmentation. Many image processing methods proposed for retinal vessels extraction. In this literature is based on Gabor filter with local entropy thresholding. Gabor filter methods often produce false Positive detections when retinal image abnormal condition thresholding. Gabor filter methods often produce false positive detections when retinal image abnormal condition.

II. Literature Survey

Optical disc, fovea, and four red and yellow abnormalities (microaneurysms, hemorrhages, exudates, and cotton wool spots) in 38 color fundus images, which were previously graded by an ophthalmologist. The abnormalities were detected using a combination of template matching, region growing, and thresholding techniques. 87% of exudates were detected during the first stage while the detection rate for the cotton wool spots was up to 95% in

terms of the lesion-based criterion. Following preliminary detection of the abnormalities, a Bayesian classifier was engaged to classify the yellow lesions into exudates, cotton wool spots, and noise. The classification performance for this stage was only 62% for exudates and 52% for the cotton wool spots Wang et al. addressed the same problem by using a minimum distance discriminant classifier to categorize each pixel into yellow lesion (exudates, cotton wool spots) or nonlesion (vessels and background) class. The objective was to distinguish yellow lesions from red lesions, therefore other yellowish lesions (e.g. cotton wool spots) were incorrectly classified at the same time.

The image-based diagnostic accuracy of this approach was reported as 100% sensitivity and 70% specificity. Gardner et al. broke down the retinal images into small squares and then presented them to a back propagation neural network. After median smoothing, the photographed red-free images with a field-of-view of 60° were fed directly into a large neural network (using 20x20 patches, with 400 inputs). This technique recognized the blood vessels, exudates, and hemorrhages. The neural network was trained for 5 days and the lesion-based sensitivity of the exudate detection method was 93.1%. Walter et al. identified exudates from the green channel of retinal images, according to their gray-level variation. After initial localization, the exudate contours were subsequently determined by mathematical morphology techniques. This approach had three parameters, the size of the local window, which was used for calculation of the pixel local variation, and two other threshold values.

III. Previous Methods

1. Blood Vessel Segmentation From Color Retinal Images Using Unsupervised Texture Classification
2. A supervised method for retinal blood vessel segmentation using line strength, multiscale Gabor and morphological features
3. Diabetic retinopathy using Region Growing Segmentation (RRGS) algorithm
4. Global thresholding for exudates detection

IV. Proposed Model

Medical Image diagnostic processing has already become an important part of clinical routine. Blood vessels damaged from diabetic retinopathy can cause vision loss. Diabetic retinopathy is a leading cause of adult blindness, and screening can reduce the incidence. Retinal images are noisy and low contrast poses significant challenges to the segmentation of blood vessels. Many Segmentation algorithms, have been presented to provide either automated or semi-automated detection of Blood vessels. Automated diagnosis may also aid decision making For optometrists. The greatest emphasis in automated diagnosis has unsurprisingly been given to the detection of diabetic retinopathy. Computer based analysis for automated extraction of blood vessels in retinal images will help ophthalmologists screen larger populations for vessel abnormalities. A wide variety of approaches have been proposed for retina blood vessels segmentation. Many image processing methods proposed for retinal vessels extraction. In this literature is based on Gabor filter with local entropy thresholding. Gabor filter methods often produce false. Positive detections when retinal image abnormal condition thresholding. Gabor filter methods often produce false positive detections when retinal image abnormal condition.

The proposed method uses the following steps shown in

- (1) Green Channel Extraction
- (2) Adaptive Histogram Equalization

- (3) Gabor Filtering
- (4) Local Entropy Thresholding
- (5) Binary Image Conversion
- (6) Detection and Removal of Optical Disk
- (7) Application of Mask, Subtraction of Mask And Disk
- (8) Display of either Normal Eye or Abnormal Eye

Block Diagram showing different modules:

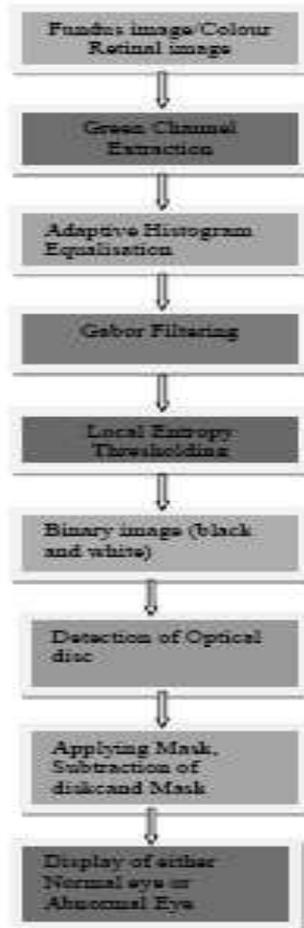


Fig.1 Block Diagram




Fig.2. Typical Retinal Image

Pre-processing

Preprocessing is a technique of image enhancement. It improves the quality of an image. Preprocessing is used to enhance the contrast in fundus image. Low contrast cause very hard to extract the fundus. So that from color retinal images we are extracting green channel which is having high contrast. Then adaptive histogram is used to improve the contrast of green channel.



Bandwidth of the Gabor filter, $\sigma_x = 19.9$

Wavelength of this filter, $\lambda = 9.8$

Spatial aspect ratio, $\gamma = 6.08$

Fig.3. Green Channel of the Original Image (left) and Equalization Image (right)
(b) Gabor Filter

Gabor filters are used for texture analysis. Sinusoidal modulated gabor filter kernels are used in this analysis. Gabor filters are band pass filters which are used in image processing for feature extraction, texture analysis, and stereo disparity estimation. The impulse response of these filters is created by multiplying an Gaussian envelope function with a complex oscillation. Gabor showed that these elementary functions minimize the space (time)-uncertainty product. By extending these functions to two dimensions it is possible to create filters which are selective for orientation. Under certain conditions the phase of the response of Gabor filters is approximately linear. This property is exploited by stereo approaches which use the phase-difference of the left and right filter responses to estimate the disparity in the stereo images. It was shown by several researchers that the profile of simple-cell receptive fields in the mammalian cortex can be described by oriented two-dimensional Gabor functions.

Fig.4. Gabor Filter Response Image

Local Entropy Thresholding

The entropy of a system was proposed by Shannon. Shannon's function is based on the concept that information gained from an event is inversely related to its probability of occurrence. Several researchers have used this concept to image processing problems. They can partition the image into object and background. An efficient entropy-based thresholding algorithm is used to retinal blood vessel detection. This algorithm takes into account the spatial distribution of gray levels, because the image pixel intensities are not independent of each other. According to this, two images with same histograms but different spatial

distribution will result in different threshold values. Given image F is a P×Q dimensional matrix, [tij]P×Q is the co-occurrence matrix of the image F , this co-occurrence matrix gives an idea about the transition of intensities between adjacent pixels, indicating spatial structural information of an image.

Graylevel Co-Occurrence Matrix

A statistical method of examining texture that considers the spatial relationship of pixels is the gray-level co-occurrence matrix (GLCM), also known as the gray-level spatial dependence matrix. The GLCM functions characterize the texture of an image by calculating how often pairs of pixel with specific values and in a specified spatial relationship occur in an image, creating a GLCM, and then extracting statistical measures from this matrix. (The texture filter functions, described in Texture Analysis cannot provide information about shape, i.e., the spatial relationships of pixels in an image.)It provides the information about contrast, correlation and energy.The gray-level co-occurrence matrix can reveal certain properties about the spatial distribution of the gray levels in the texture image. For example, if most of the entries in the GLCM are concentrated along the diagonal, the texture is coarse with respect to the specified offset. You can also derive several statistical measures from the GLCM. See Derive Statistics from GLCM and Plot Correlation for more information.To illustrate, the following figure shows how graycomatrix calculates the first three values in a GLCM. In the output GLCM, element (1,1) contains the value 1 because there is only one

- (1) instance in the input image where two horizontally adjacent pixels have the values 1 and 1, respectively. gpcm(1,2) contains the value 2 because there are two instances where two horizontally adjacent pixels have the values 1 and 2. Element (1,3) in the GLCM has the value 0 because there are no instances of two horizontally adjacent pixels with the values 1 and 3.Graycomatrix continues processing the input image, scanning the image for other pixel pairs (i,j) and recording the sums in the corresponding elements of the GLCM.

$$\sigma_x = k$$

$$\sigma_y = \frac{\sigma_x}{\gamma}$$

$$x_\theta = x \cos \theta + y \sin \theta$$


$$y_\theta = -x \sin \theta + y \cos \theta$$

Gabor filter kernel:

$$g_\theta(x, y) = \exp\left\{-\frac{1}{2}\left(\frac{x_\theta^2}{\sigma_x^2} + \frac{y_\theta^2}{\sigma_y^2}\right)\right\} \cos\left(2\pi\frac{x_\theta}{\lambda} + \psi\right)$$

- (5) Gray level co-occurrence matrix consists of information of the gray level transitions in an image. A Gabor filter response image has a size of M*N with L grey levels that converted co-occurrence matrix

of this image is an L*L square matrix, denoted by

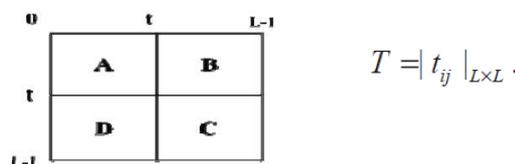

GLCM Quadrants

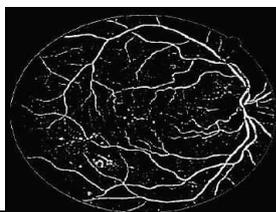


Fig.6. Proposed segmented image

$$\text{When } \sigma=1 \text{ if } \begin{cases} f(l, k) = i \text{ and } f(l, k + 1) = j \\ \text{OR} \\ f(l, k) = i \text{ and } f(l + 1, k) = j \end{cases}$$

$\sigma=1$ otherwise.

Image Segmentation Exudate detection. The exudate detection is performed by assigning a score for each exudate candidate. Using the morphological operations like Dilation, Erosion i.e, Expanding and thinning, opening and closing functions, image is resized and than the round object of an eye, optical disc is detected and subtracted with mask hence exudates gets clear and visible on display and eye can be detected as either normal or abnormal eye.




Fig.7 Image after morphological closing

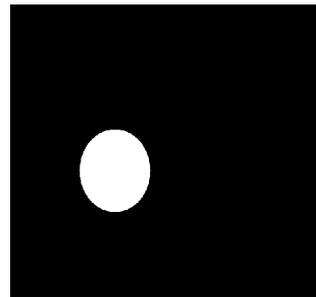


Fig.8 Detection of optical disc


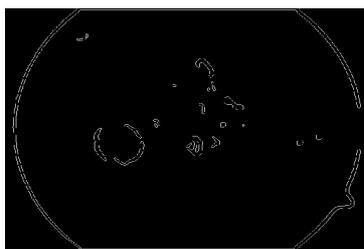


Fig.9 Circular mask on optic disc

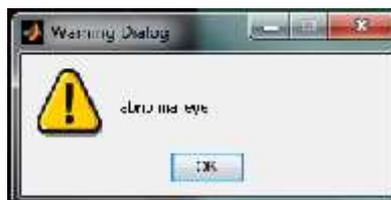

Conclusion

This segmentation method is a very suitable application for automatic tool for early Diabetic Retinopathy (DR) detection. This paper, first introduce Gabor filter with local entropy thresholding for vessels extraction automatically. This Analysis manifested maximum true positive rate and reduce false vessels detection in fundus. The execution of the proposed method is assessed by comparing DRIVE database images .This method average

accuracy and sensitivity (S_e) are calculated. This method can be applied for image registration purpose to track the change in fundus for monitoring Diabetic Retinopathy.

References

- [1] American Diabetes Association. Standards of medical care for patients with diabetes mellitus. *Diabetes Care* 2000; 23: S32–S42.
- [2] Alireza Osareh and Bitashadgar, “Retinal Vessel Extraction Using Gabor Filters and Support Vector Machines,” *Advances in Computer Science and Engineering Communications in Computer and Information Science* Volume 6, pp. 356-363, 2009.
- [3] Alauddin Bhuiyan, Baikunth Nath, Joselito Chua and Ramamohanarao Kotagiri, “Blood Vessel Segmentation From Color Retinal Images Using Unsupervised Texture Classification,” *Image Processing, 2007. ICIP 2007. IEEE International Conference*, Vol: 5, Publication Year: 2007, Page(s): V - 521 - V - 524
- [4] P.C. Siddalingaswamy, K. Gopalakrishna Prabhu, “Automatic Segmentation of Blood Vessels in Colour Retinal Images using Spatial Gabor Filter and Multiscale Analysis,” *13th International Conference on Biomedical Engineering, IFMBE Proceedings* Volume 23, 2009, pp 274-276 Springer
- [5] Wu, D.; Ming Zhang; Jyh-Charn Liu; Bauman, W., "On the adaptive detection of blood vessels in retinal images," *Biomedical Engineering, IEEE Transactions*, vol.53, no.2, pp.341,343, Feb. 2006
- [6] Fraz, M.M.; Remagnino, P.; Hoppe, A.; Velastin, S.; Uyyanonvara, B.; Barman, S.A., "A supervised method for retinal blood vessel segmentation using line strength, multiscale Gabor and morphological features," *Signal and Image Processing Applications (ICSIPA), 2011 IEEE International Conference on*, vol., no., pp.410,415, 16-18 Nov. 2011.
- [7] X. Jiang and D. Mojon, “Adaptive local thresholding by verification based multi-threshold probing with application to vessel detection in retinal images”, *IEEE Trans. Pattern Anal. Mach. Intell.*, vol. 25, no.1, pp. 131–137, 2003.
- [8] J. V. B. Soares, J. J. G. Leandro, R. M. Cesar Júnior, H. F. Jelinek, and M. J. Cree, “Retinal vessel segmentation using the 2-D Gabor wavelet and supervised classification”, *IEEE Trans. Med. Imaging*, vol. 25, no. 9, pp. 1214–1222, Sep. 2006.
- [9] D. Marín, A. Aquino, M. E. Gegúndez-Arias, and J. M. Bravo, “A new supervised method for blood vessel segmentation in retinal images by using gray-level and moment invariants-based features”, *IEEE Trans. Med. Imaging*, vol. 30, no. 1, pp. 146–158, 2011.
- [10] A. Bhuiyan, B. Nath, J. Chua, and R. Kotagiri, “Blood vessel segmentation from color retinal images using unsupervised texture classification” in *Image Processing, 2007. ICIP 2007. IEEE International Conference on*, 2007, vol. 5, pp. 521–524.
- [11] Z. Yavuz and C. Kose, “Retinal Blood Vessel Segmentation Using Gabor Filter and Top-Hat Transform” in *19th Conference on Signal Processing and Communications Applications (SIU 2011)*, 2011, pp. 546–549.
- [12] R. Nock and F. Nielsen, “On weighting clustering”, *IEEE Trans. Pattern Anal. Mach. Intell.*, vol. 28, no. 8, pp. 1223–35, Aug. 2006